



## Undercutting Guide

Undercutting end mills, often referred to as lollipop cutters, are extremely versatile tools. Harvey tool offers a variety of reach and wrap angles to provide an answer for even the most difficult of applications. Due to the varying neck lengths and the applications, specific machining parameters must be calculated to avoid breakage.

### Speeds & Feeds calculations:

1. Determine the correct SFM and Base Chip Load (IPT) for the cutter, material and application (see application descriptions Figure 1.)
2. Adjust Chip Load to account for neck length to cutter diameter ratio. (see Table 1)
3. Calculate the Speed (RPM) and Linear Feed (IPM)
4. Determine correct number of passes

Example: Tool #989562 to machine for a Deburring application in 4140 steel at 32 Rc.

1. Using Figure 1 (upper right), determine the type of application you will be performing.

From Speeds & Feeds chart (next page), SFM is 200 and Base Chip Load (IPT) for Deburring is .00013

2. Calculate the neck length to neck diameter ratio for the tool. Calculate adjusted chipload based on values in Table 1.

$$\begin{aligned} \text{Neck Length Ratio} &= (\text{Neck Length} / \text{Neck Diameter}) \\ &= (.031 / .024) \\ &= 1.3 \end{aligned}$$

$$\begin{aligned} \text{Adjusted Chip Load} &= \text{Adjustment Factor} \times \text{Base Chip Load} \\ &= 1.2 \times .00013 \\ &= .00016 \end{aligned}$$

3. Calculate Speed (RPM) and Linear Feed (IPM)

$$\begin{aligned} \text{RPM} &= (\text{SFM} \times 3.82) / \text{Cutter Diameter} \\ &= (200 \times 3.82) / .062 \\ &= 12322 \end{aligned}$$

$$\begin{aligned} \text{Linear Feed (IPM)} &= \text{RPM} \times \text{IPT} \times \text{Number of Flutes} \\ &= 12322 \times .00016 \times 2 \\ &= 3.9 \end{aligned}$$

4. From Speeds & Feeds chart (next page), the number of passes for a deburring operation in 4140 steel is 1 pass.

5. Conclusion

In this example, the tool would run at 12322 RPM, 3.9 IPM and make 1 pass.

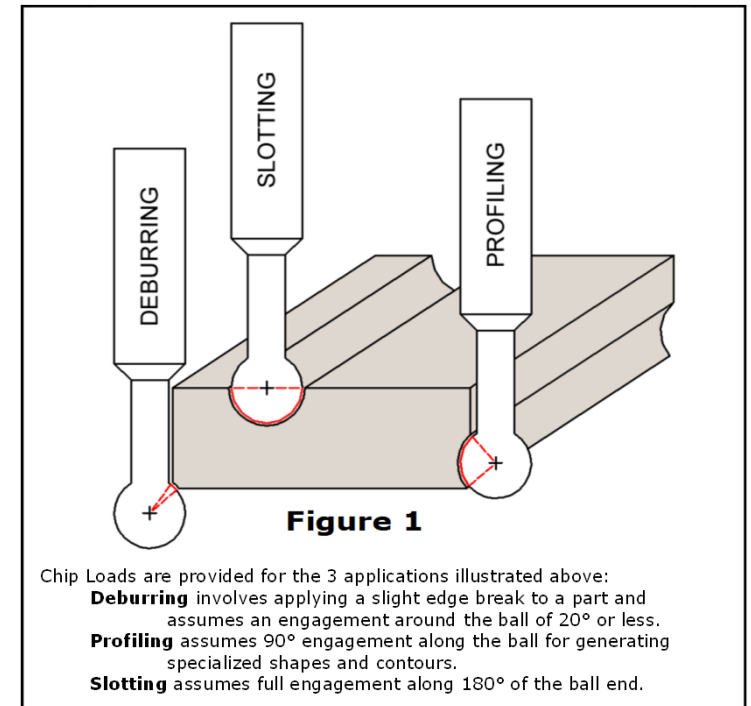


Table 1	
Neck Length Multiple	Chip Load
3x	120%
5x	100%
8x	80%
12x	65%
15x	55%

MATERIAL	Hardness: ≤ 28 Rc (≤ 271 HBn)													Depth of Cut Passes	
	SFM	Chip Load (IPT) By Cutter Diameter													
		0.015	0.031	0.047	0.062	0.078	0.093	0.125	0.187	0.250	0.312	0.375	0.500		
<b>ALUMINUM ALLOYS</b>															
Casting (2xx, 5xx, 7xx, 8xx)	750	Deburring	.00009	.00020	.00030	.00039	.00049	.00059	.00079	.00118	.00158	.00197	.00237	.00316	1
		Profiling	.00008	.00017	.00026	.00034	.00043	.00051	.00069	.00103	.00138	.00172	.00206	.00275	2
Wrought (1xxx, 2xxx, 3xxx, 5xxx, 6xxx, 7xxx, 8xxx)	1000	Slotting	.00008	.00017	.00026	.00034	.00043	.00051	.00069	.00103	.00138	.00172	.00206	.00275	3
	750	Deburring	.00009	.00018	.00027	.00035	.00044	.00053	.00071	.00106	.00142	.00178	.00213	.00285	1
Casting - 3%-5% Si (3xx, A3xx, C3xx, 4xx, A4xx, B4xx)	700	Profiling	.00007	.00015	.00023	.00031	.00039	.00046	.00062	.00093	.00124	.00154	.00186	.00248	2
	650	Slotting	.00007	.00015	.00023	.00031	.00039	.00046	.00062	.00093	.00124	.00154	.00186	.00248	3
Casting - 8%-12% Si (3xx, A3xx, C3xx, 4xx, A4xx, B4xx)	475	Deburring	.00009	.00018	.00027	.00035	.00044	.00053	.00071	.00106	.00142	.00178	.00213	.00285	1
	1000	Profiling	.00008	.00017	.00026	.00034	.00043	.00051	.00069	.00103	.00138	.00172	.00206	.00275	2
Wrought - 5%-8% Si (4xxx)	800	Slotting	.00007	.00015	.00023	.00031	.00039	.00046	.00062	.00093	.00124	.00154	.00186	.00248	3
	1500	Deburring	.00009	.00020	.00030	.00039	.00049	.00059	.00079	.00118	.00158	.00197	.00237	.00316	1
<b>MAGNESIUM ALLOYS</b>															
	800	Profiling	.00008	.00017	.00026	.00034	.00043	.00051	.00069	.00103	.00138	.00172	.00206	.00275	2
		Slotting	.00008	.00017	.00026	.00034	.00043	.00051	.00069	.00103	.00138	.00172	.00206	.00275	3
<b>ZINC ALLOYS</b>															
<b>COPPER ALLOYS</b>	225	Deburring	.00008	.00016	.00024	.00031	.00039	.00047	.00063	.00095	.00127	.00158	.00190	.00253	1
	500	Profiling	.00007	.00014	.00021	.00027	.00034	.00041	.00055	.00082	.00110	.00137	.00165	.00220	2
High Coppers - 90%+ (C1xxx) Brass (Copper Zinc alloys, C2xxx, C3xxx, C4xxx, C6400-C69800) Phosphor Bronzes (Copper Tin alloys, C5xxx) Aluminum Bronzes (Copper Aluminum alloys, C60600-C64200) Silicon Bronzes (Copper Silicon alloys, C64700-C66100) Copper Nickels, Nickel Silvers (Copper Nickel alloys, C7xxx) Cast Copper Alloys (C83300-C86200, C86400-C87900, C92200-C95800, C97300-C97800, C99400-C99700)	225	Slotting	.00007	.00014	.00021	.00027	.00034	.00041	.00055	.00082	.00110	.00137	.00165	.00220	3
	550	Deburring	.00008	.00016	.00024	.00031	.00039	.00047	.00063	.00095	.00127	.00158	.00190	.00253	1



**Product Table:** Undercutting End Mills - 300°  
**Characteristics:** Standard Helix, 2 Flutes  
**Series:** 7666xx, 7678xx, 8757xx, 8758xx, 9268xx, 9400xx, 9791xx, 9792xx, 9839xx, 9840xx, 9895xx

**Product notes:**  
 Posted values are Base Chip Loads and do not account for varying neck lengths. Use Table 1 (previous page) to determine the correct adjustment multiplier and calculate final adjusted chip loads.

**General notes:**  
 All posted speed and feed parameters are suggested starting values that may be increased given optimal setup conditions. Chip loads reflect uncoated cutters and may be increased 10%-20% if coated. For ferrous materials with hardness ≤ 28 Rc, chip loads can be increased 10%-20%.

If you require additional information, Harvey Tool has a team of technical experts available to assist you through even the most challenging applications. Please contact us at **800-645-5609** or [harveytech@harveyperformance.com](mailto:harveytech@harveyperformance.com).  
 WARNING: Cutting tools may shatter under improper use. Government regulations require use of safety glasses and other

MATERIAL	Hardness: 29-37 Rc (279-344 HBn)													Depth of Cut Passes	
	SFM	Chip Load (IPT) By Cutter Diameter													
		0.015	0.031	0.047	0.062	0.078	0.093	0.125	0.187	0.250	0.312	0.375	0.500		
<b>CARBON STEELS</b>															
Free-Machining/Low Carbon steels, 10xx - 1029 & all 10Lxx, 11xx - 1139 & all 11Lxx, 12xx - 1215 & all 12Lxx	600	Deburring	.00003	.00007	.00011	.00014	.00018	.00021	.00029	.00043	.00058	.00072	.00087	.00115	1
		Profiling	.00003	.00006	.00009	.00012	.00016	.00019	.00025	.00038	.00050	.00063	.00075	.00100	3
		Slotting	.00003	.00006	.00009	.00012	.00016	.00019	.00025	.00038	.00050	.00063	.00075	.00100	4
1030 - 1095, 1140 - 1151, 13xx, 15xx, 20xx, 30xx, 40xx & 4xLxx, 50xx & 5xLxx, 50xxx & 50Lxxx, 51xxx & 51Lxxx, 52xxx & 52Lxxx, 60xx, 80xx, 90xx	200	Deburring	.00003	.00007	.00010	.00013	.00016	.00020	.00026	.00039	.00053	.00066	.00079	.00106	1
		Profiling	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	3
		Slotting	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	4
<b>STAINLESS STEELS</b>															
203 EZ, 303 (all types), 416, 416Se, 416 Plus X, 420F, 420FSe, 430F, 430FSe, 440F, 440FSe	450	Deburring	.00003	.00007	.00011	.00014	.00018	.00021	.00029	.00043	.00058	.00072	.00087	.00115	1
		Profiling	.00003	.00006	.00009	.00012	.00016	.00019	.00025	.00038	.00050	.00063	.00075	.00100	3
		Slotting	.00003	.00006	.00009	.00012	.00016	.00019	.00025	.00038	.00050	.00063	.00075	.00100	4
201, 202, 203, 205, 301, 302, 304, 304L, 308, 309, 310, 314, 316, 316L, 317, 321, 329, 330, 347, 348, 385, 403, 405, 409, 410, 413, 420, 429, 430, 434, 436, 442, 446, 501, 502	200	Deburring	.00003	.00007	.00010	.00013	.00016	.00020	.00026	.00039	.00053	.00066	.00079	.00106	1
		Profiling	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	3
		Slotting	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	4
414, 431, 440A, 440B, 440C, 13-8, 15-8, 15-7, 17-4, 17-7	150	Deburring	.00002	.00004	.00006	.00008	.00010	.00012	.00016	.00025	.00033	.00041	.00049	.00066	1
		Profiling	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	3
		Slotting	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	4
<b>TOOL STEELS</b>															
A, L, O, P, W series	200	Deburring	.00003	.00007	.00010	.00013	.00016	.00020	.00026	.00039	.00053	.00066	.00079	.00106	1
		Profiling	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	3
		Slotting	.00003	.00006	.00009	.00011	.00014	.00017	.00023	.00034	.00046	.00057	.00069	.00092	4
D, H, M, T, S series	150	Deburring	.00002	.00004	.00006	.00008	.00010	.00012	.00016	.00025	.00033	.00041	.00049	.00066	1
		Profiling	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	3
		Slotting	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	4
<b>TITANIUM ALLOYS</b>	150	Deburring	.00002	.00004	.00006	.00008	.00010	.00012	.00016	.00025	.00033	.00041	.00049	.00066	1
		Profiling	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	3
		Slotting	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	4
<b>HIGH TEMP ALLOYS</b>	70	Deburring	.00002	.00004	.00006	.00008	.00010	.00012	.00016	.00025	.00033	.00041	.00049	.00066	1
		Profiling	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	3
		Slotting	.00002	.00004	.00005	.00007	.00009	.00011	.00014	.00021	.00029	.00036	.00043	.00057	4

MATERIAL	Hardness: 38-45 Rc (353-421 HBn)													Depth of Cut Passes	
	SFM	Chip Load (IPT) By Cutter Diameter													
		0.015	0.031	0.047	0.062	0.078	0.093	0.125	0.187	0.250	0.312	0.375	0.500		
Free-Machining/Low Carbon steels, 10xx - 1029 & all 10Lxx, 11xx - 1139 & all 11Lxx, 12xx - 1215 & all 12Lxx		Deburring	-	-	-	-	-	-	-	-	-	-	-	-	-
		Profiling	-	-	-	-	-	-	-	-	-	-	-	-	-
		Slotting	-	-	-	-	-	-	-	-	-	-	-	-	-
1030 - 1095, 1140 - 1151, 13xx, 15xx, 20xx, 30xx, 40xx & 4xLxx, 50xx & 5xLxx, 50xxx & 50Lxxx, 51xxx & 51Lxxx, 52xxx & 52Lxxx, 60xx, 80xx, 90xx		Deburring	-	-	-	-	-	-	-	-	-	-	-	-	-
		Profiling	-	-	-	-	-	-	-	-	-	-	-	-	-
		Slotting	-	-	-	-	-	-	-	-	-	-	-	-	-
203 EZ, 303 (all types), 416, 416Se, 416 Plus X, 420F, 420FSe, 430F, 430FSe, 440F, 440FSe		Deburring	-	-	-	-	-	-	-	-	-	-	-	-	-
		Profiling	-	-	-	-	-	-	-	-	-	-	-	-	-
		Slotting	-	-	-	-	-	-	-	-	-	-	-	-	-
201, 202, 203, 205, 301, 302, 304, 304L, 308, 309, 310, 314, 316, 316L, 317, 321, 329, 330, 347, 348, 385, 403, 405, 409, 410, 413, 420, 429, 430, 434, 436, 442, 446, 501, 502		Deburring	.00003	.00006	.00009	.00012	.00015	.00017	.00023	.00035	.00047	.00058	.00070	.00093	1
		Profiling	.00002	.00005	.00008	.00010	.00013	.00015	.00020	.00030	.00041	.00051	.00061	.00081	4
		Slotting	.00002	.00005	.00008	.00010	.00013	.00015	.00020	.00030	.00041	.00051	.00061	.00081	5
414, 431, 440A, 440B, 440C, 13-8, 15-8, 15-7, 17-4, 17-7		Deburring	.00002	.00004	.00005	.00007	.00009	.00011	.00015	.00022	.00029	.00036	.00044	.00058	1
		Profiling	.00002	.00003	.00005	.00006	.00008	.00009	.00013	.00019	.00025	.00032	.00038	.00051	4
		Slotting	.00002	.00003	.00005	.00006	.00008	.00009	.00013	.00019	.00025	.00032	.00038	.00051	5
A, L, O, P, W series		Deburring	.00003	.00006	.00009	.00012	.00015	.00017	.000						